

PRIME 29

e-MTB Trail



PREIS: 3299,00

TECHNOLOGIEN

STEALTH SIDE ALLOY STRUCTURE
FORWARD GEOMETRY


📦 150 kg SYSTEM WEIGHT

Ø 29"



SPEZIFIKATIONEN

RAHMEN	Prime 6061 Alloy Stealth, Forward Geometry, internal removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor
GRÖßEN	XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm
DÄMPFER	/
EINSTELLMÖGLICHKEITEN	/
GABEL	RockShox Judy Silver TK 29, 120mm, Solo Air, tapered steerer tube, EMTB, Boost 15x110mm axle, 30mm steel stanchions, 51mm offset. Settings: 2 pos compression (open/lock), rebound, air preload
STEUERSATZ	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
VORBAU	Onoff Sulfur FG 30mm, 6061 forged alloy, 31.8mm barbore
LENKER	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbore
GRIFFE	Onoff Twin, 1lock-on, 135mm
SATTELSTÜTZE	Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
SATTEL	Mondraker e-MTB custom design
BREMSE VORNE	Shimano MT201, RT66 203mm IS 6 bolts rotor, resin pads
BREMSE HINTEN	Shimano MT201, RT66 180mm IS 6 bolts rotor, resin pads
BREMSHEBEL	Shimano MT201, servo wave, alloy lever
FELGEN	MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes
SPEICHEN	CN round stainless steel

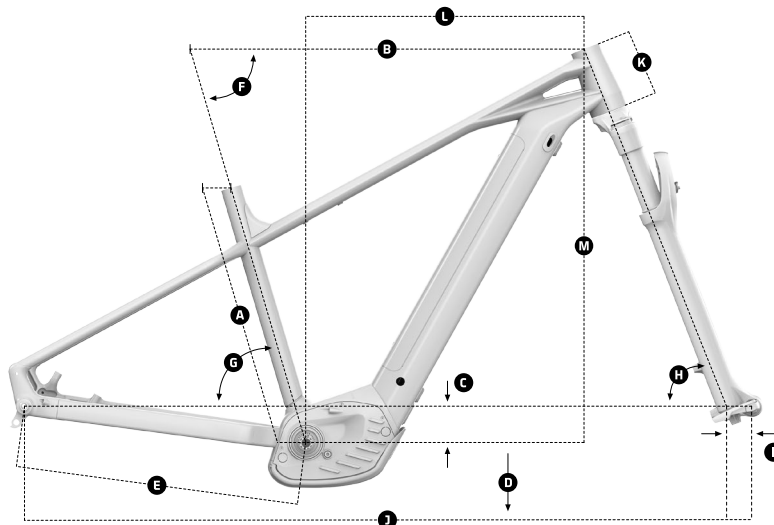

GEOMETRIE

Größe	XS	S	M	L	XL
A Sitzrohrlänge	380 mm	390 mm	430 mm	470 mm	510 mm
B Oberrohrlänge	600 mm	615 mm	645 mm	670 mm	700 mm
C Tretlagerabsenkung	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Tretlagerhöhe	318 mm	318 mm	318 mm	318 mm	318 mm
E Kettenstrebenlänge	455 mm	455 mm	455 mm	455 mm	455 mm
F Sitzwinkel, (real)	73.5°	73.5°	73.5°	73.5°	73.5°
G Sitzwinkel (effektiv)	73.5°	73.5°	73.5°	73.5°	73.5°
H Lenkwinkel	69°	69°	69°	69°	69°
I Gabelvorbiegung	51 mm	51 mm	51 mm	51 mm	51 mm
J Radstand	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Steuerrohrlänge	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

MODELL	FARBE	XS	S	M	L	XL
Prime 29	Black / Nimbus Grey / Flame Red	010.20211	010.20212	010.20213	010.20214	010.20215
Prime 29	Black / Light Blue / Flame Red	010.20216	010.20217	010.20218	010.20219	010.20220

NABE VORDERRAD	MDK DC711 15x110mm, cup & cone ball bearings, IS 6 bolts
NABE HINTERRAD	MDK EHL148 12x148mm, sealed bearings, IS 6 bolts
REIFEN VORNE	Maxxis Rekon 29x2.6 tubeless ready, Dual compound, EXO protection, 60TPI, folding bead
REIFEN HINTEN	Maxxis Rekon 29x2.6 tubeless ready, Dual compound, EXO protection, 60TPI, folding bead
MOTOR	Bosch Performance Line CX system Gen4, 625 Wh PowerTube battery, Purion on-board computer, RaceFace Aeffect ebike crankset, 165mm
KETTENBLÄTTER	SRAM X-Sync 2 Eagle 34T, narrow-wide, Bosch Gen4 DM
TRETLAGER	/
PEDALE	/
KETTE	Sram SX Eagle, 12s
KETTENFÜHRUNG / UMWERFER	/
SCHALTWERK	Sram SX, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SCHALTHEBEL	Sram Trigger SX, 12s, X-Actuation 1:1, single click
KASSETTE	Sram PG-1210 Eagle 11-50, 12s
SCHALTAUGE	Mondraker M068
SONSTIGES	/
GEWICHT OHNE PEDALE	21.5 kg