

PRIME +

e-MTB Trail



PREIS: 3299,00

TECHNOLOGIEN

STEALTH SIDE ALLOY STRUCTURE
FORWARD GEOMETRY


📦 150 kg SYSTEM WEIGHT

🌀 27'5+



SPEZIFIKATIONEN

RAHMEN	Prime 6061 Alloy Stealth, Forward Geometry, internal removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor
GRÖßEN	XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm
DÄMPFER	/
EINSTELLMÖGLICHKEITEN	/
GABEL	RockShox Judy Silver TK 29, 120mm, Solo Air, tapered steerer tube, EMTB, Boost 15x110mm axle, 30mm steel stanchions, 51mm offset. Settings: 2 pos compression (open/lock), rebound, air preload
STEUERSATZ	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
VORBAU	Onoff Sulfur FG 30mm, 6061 forged alloy, 31.8mm barbare
LENKER	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
GRIFFE	Onoff Twin, 1lock-on, 135mm
SATTELSTÜTZE	Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
SATTEL	Mondraker e-MTB custom design
BREMSE VORNE	Shimano MT201, RT66 203mm IS 6 bolts rotor, resin pads
BREMSE HINTEN	Shimano MT201, RT66 180mm IS 6 bolts rotor, resin pads
BREMSHEBEL	Shimano MT201, servo wave, alloy lever
FELGEN	MDK-HP1 275, 35mm internal width, tubeless ready, 32 spokes
SPEICHEN	CN round stainless steel

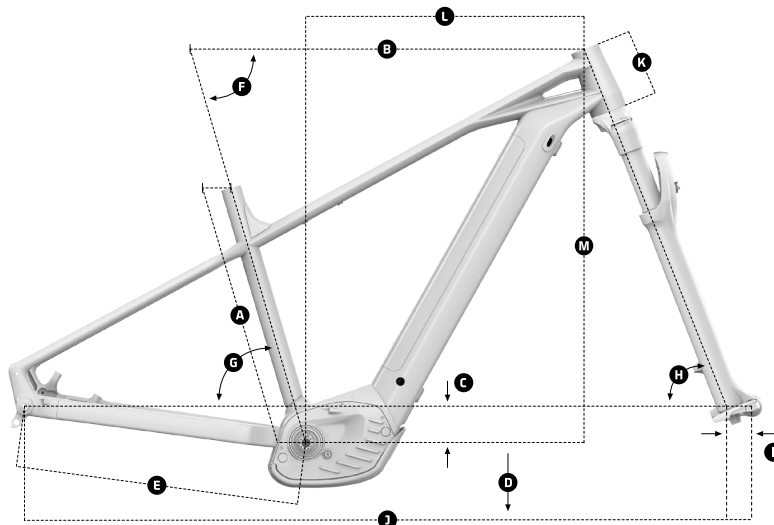

GEOMETRIE

Größe	XS	S	M	L	XL
A Sitzrohrlänge	380 mm	390 mm	430 mm	470 mm	510 mm
B Oberrohrlänge	600 mm	615 mm	645 mm	670 mm	700 mm
C Tretlagerabsenkung	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Tretlagerhöhe	305 mm	305 mm	305 mm	305 mm	305 mm
E Kettenstrebenlänge	455 mm	455 mm	455 mm	455 mm	455 mm
F Sitzwinkel, (real)	73.5°	73.5°	73.5°	73.5°	73.5°
G Sitzwinkel (effektiv)	73.5°	73.5°	73.5°	73.5°	73.5°
H Lenkwinkel	69°	69°	69°	69°	69°
I Gabelvorbiegung	51 mm	51 mm	51 mm	51 mm	51 mm
J Radstand	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Steuerrohrlänge	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

MODELL	FARBE	XS	S	M	L	XL
Prime +	Black / Nimbus Grey / Flame Red	010.20201	010.20202	010.20203	010.20204	010.20205
Prime +	Black / Light Blue / Flame Red	010.20206	010.20207	010.20208	010.20209	010.20210

NABE VORDERRAD	MDK DC711 15x110mm, cup & cone ball bearings, IS 6 bolts
NABE HINTERRAD	MDK EHL148 12x148mm, sealed bearings, IS 6 bolts
REIFEN VORNE	Maxxis Rekon+ 27.5x2.8 tubeless ready, Dual compound, EXO protection, 60TPI, folding bead
REIFEN HINTEN	Maxxis Rekon+ 27.5x2.8 tubeless ready, Dual compound, EXO protection, 60TPI, folding bead
MOTOR	Bosch Performance Line CX system Gen4, 625 Wh PowerTube battery, Purion on-board computer, RaceFace Aeffect ebike crankset, 165mm
KETTENBLÄTTER	SRAM X-Sync 2 Eagle 34T, narrow-wide, Bosch Gen4 DM
TRETLAGER	/
PEDALE	/
KETTE	Sram SX Eagle, 12s
KETTENFÜHRUNG / UMWERFER	/
SCHALTWERK	Sram SX, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SCHALTHEBEL	Sram Trigger SX, 12s, X-Actuation 1:1, single click
KASSETTE	Sram PG-1210 Eagle 11-50, 12s
SCHALTAUGE	Mondraker M068
SONSTIGES	/
GEWICHT OHNE PEDALE	21.9 kg